


## 3014 SINGLE COLOR 120 LEDS/M - 5M

### SPECIFICATIONS


|                           |   |
|---------------------------|---|
| Brand:                    | CDNLUX  |
| Model:                    | MTL-FP10AFXXX-120AXW  |
| Certification:            | cULus E498952   |
| Chip:                     | Epistar 3014 SMD  |
| Length:                   | 5 meters  |
| Width:                    | iP20: 10mm  |
| Chip density:             | 120 LED per meter, 600 LEDs total                                 |
| Beam angle:               | 120°  |
| Cutline:                  | 12V Each 3 LEDs (2.5cm), 24V Each 6 LEDs (5cm)                    |
| Voltage available:        | 12V or 24V DC (Constant Voltage)                                  |
| Required Power:           | 12W / meter   |
| Recommended Power Supply: | 14.4W / meter, must be powered by a class 2 power supply          |
| Color temperature:        | 2700K / 3000K / 3500K / 4000K / 5000K / 6000K                     |
| Lumens                    | ≈ 1000lm  |
| ICR :                     | 80+ (90+ available on custom order)                               |
| Self-adhesive:            | 3M  |
| Suitable environment:     | iP20: dry   |
| Temperature:              | Storage: 50°C to -40°C Operating: 50°C to -25°C                   |
| Dimmable:                 | Yes, through a low voltage dimmer or with a dimmable power supply |
| Heat Dissipation:         | Mandatory   |
| Application:              | Under cabinet, recessed cove lighting, shelves, etc.              |
| Lifetime:                 | > 50 000 Hours  |



#### Color Temperature (Kelvin)

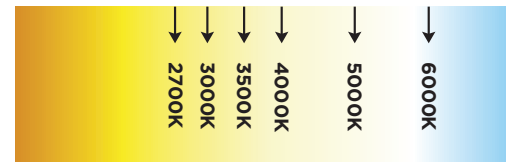

#### Female DC Plug (beginning) Wires Red + Black - (end)



### DIMENSIONS 24V

