


## 3528 SINGLE COLOR 120 LEDS/M - 5M

### SPECIFICATIONS


<b>Brand:</b>	CDNLUX
<b>Model:</b>	MTL-FP8AEXXX-120AXW
<b>Certification:</b>	cULus E498952
<b>Chip:</b>	Epistar 3528 SMD
<b>Length:</b>	5 meters
<b>Width:</b>	iP20: 8mm    iP65+: ≈ 10mm    iP67+: ≈ 11mm
<b>Chip density:</b>	120 LED per meter, 600 LEDs total
<b>Beam angle:</b>	120°
<b>Cutline:</b>	12V Each 3 LEDs (2.5cm), 24V Each 6 LEDs (5cm)
<b>Voltage available:</b>	12V or 24V DC (Constant Voltage)
<b>Required Power:</b>	9.6W / meter
<b>Recommended Power Supply:</b>	12W / meter, must be powered by a class 2 power supply
<b>Color temperature:</b>	1800K / 2400K / 2700K / 3000K / 3500K / 4000K / 5000K / 6000K
<b>Lumens:</b>	≈ 800lm
<b>CRI :</b>	80+ (90+ available on custom order)
<b>Self-adhesive:</b>	3M
<b>Suitable environment:</b>	iP20: Dry    iP65+: Humid    iP67+: Humid
<b>Temperature:</b>	Storage: 50°C to -40°C Operating: 50°C to -25°C
<b>Dimmable:</b>	Yes, through a low voltage dimmer or with a dimmable power supply
<b>Application:</b>	Under cabinet, recessed cove lighting, shelves, etc.
<b>Dissipation de la chaleur:</b>	Mandatory
<b>Lifetime:</b>	> 50 000 Hours



#### Color Temperature (Kelvin)

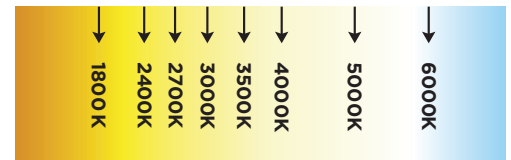

#### Female DC Plug (beginning) Wires Red + Black - (end)



### DIMENSIONS 24V

